


MAGNETON

ALTERNATOR

9516 933

IMPORTANT DIMENSIONS TO FIT ON ENGINE

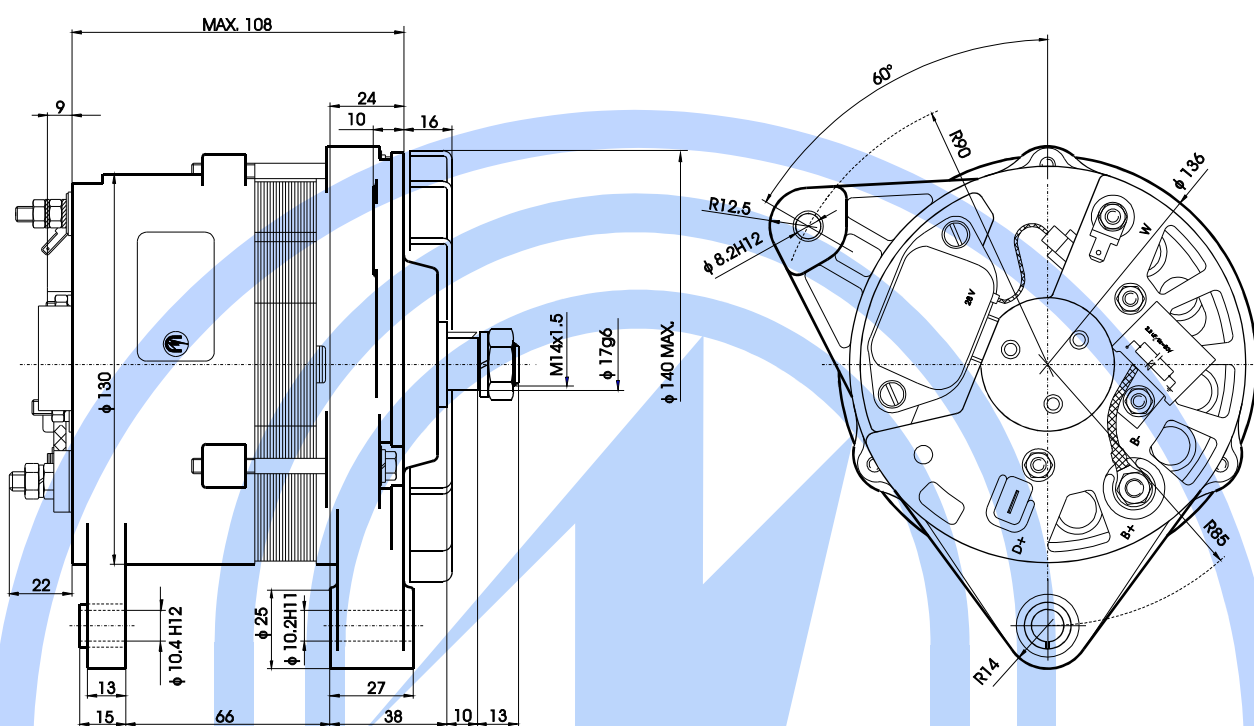

TECHNICAL DATA

Nominal voltage
Rated current at 1 800min⁻¹
Rated current at 6 000min⁻¹

28V
17A
43A

Maximum speed
Zero speed
Weight

13 000min⁻¹
1 300min⁻¹
4,6kg

APPLICATIONS

Alternator with separate wrapped CW fan without pulley.

CROSS REFERENCES

Použití alternátoru 9516 933
Applications of alternator 9516 933

BRAND	MODEL	TYPE	ENGINE kW	PS	ccm	PRODUCTION YEAR
-------	-------	------	--------------	----	-----	--------------------



Náhradní díly alternátoru 9516 933

Spare parts of alternator 9516 933

Page 3 / 3

1.0 Víko přední sestavené Front cover assy		Cat. No. 0137231
2.0 Rotor sestavený Rotor assy		Cat. No. 0135761
3.0 Víko zadní sestavené Rear cover assy		Cat. No. 0137071
4.0 Usměrňovací blok Rectifier		Cat. No. 0138921
5.0 Držák uhlíků s regulátorem Brush holder with regulator		Cat. No. 0134731
6.0 Stator sestavený Stator assy		Cat. No. 0137991
7.0 Řemenice Pulley		Cat. No. -
8.0 Ventilátor Fan		Cat. No. 5233457

Poznámka Note

1. Víko přední sestavené je dodáváno včetně předního ložiska.
Front cover assembly is supplied with front bearing.
2. Rotor sestavený je dodáván včetně zadního ložiska.
Rotor assembly is supplied with rear bearing.
3. Víko zadní sestavené je dodáváno včetně usměrňovače.
Rear cover assembly is supplied with the rectifier.

